



Please add a new device



Home page appears.  
Press the “ADD DEVICE” button  
to add HT300S SMART.



Please choose a device



**HT300S Smart**

**SELECT**

Press the “SELECT” button for HT300S SMART.



**G***Life*

Give the device a name

Continue

Give the device a name and  
press “Continue” button.



If you activate the Location Mode, your Smart Room Thermostat will automatically bring the ambient temperature to the value you have set when you approach or move away from the relevant location.

### Location Access

GLife collects location data to automatically adjust the ambient temperature according to value you have set as you approach or move away from the relevant location where your Smart Room Thermostat is located even when the application is closed or not in use.

OK

Location Permission is Obtaining...

Allow location access to use “Location Mode” and see current weather condition.





Firstly, remove the key lock while setting up your HT300S Smart device. Press the On/Off button for 4 seconds to switch the device to Off mode. Then, press the temperature decrease button for 4 seconds and wait for '1' appears on the screen.

'1' Appeared on the Screen

Plug in the device before initiating the setup.

Remove the key lock by pressing the “ Mode “ button for 2 seconds.

Turn off the device by pressing the “ On/Off “ button for 4 seconds.

The number “1” will appear on the screen once you press the temperature decreasing button for 4 seconds.



Connect to HT300S\_SMART\_XXXX network with Wi-Fi and  
proceed to the next screen

Check the HT300S Smart connection

Go to the Wi-Fi settings of your device and make sure you are connected to the HT300S\_SMART\_XXXX network. Then, press the “Check the HT300S Smart connection” button.



Choose the Wi-Fi Network you use at your home  
or office and enter the password

ISIPARK



ISIPARK-GUEST



ISIPARK-1



ISIPARK-2



HP-PRINT



GENERAL LIFE



ISIPARK

generallife

Connect to Wi-Fi

Choose the Wi-Fi Network that  
HT300S SMART can connect  
and enter the password.  
In case the Wi-Fi network does  
not appear in the list, manually  
type the network name

Press "Connect to Wi-Fi" button  
once correct information is  
entered.



Please wait until '2' and '3' appears on HT300S Smart's screen, respectively. If '1' appeared on the screen, it indicates that you have entered incorrect Wi-Fi information. Please turn back to HT300S Smart network connection step and follow the instructions again.

'3' Appeared on the Screen

Wait until the number “3” is shown on the device.  
Press the button if you see the number “3” on the device.

\*If the number “1” is shown on the device, it means you have entered incorrect Wi-Fi information. Enter the correct information by returning back to the “Connect to Wi-Fi” step.



While pairing the Room Thermostat with the Receiver, you must press the pairing button on the Receiver and wait for green light flashing. Subsequently, press the temperature increase button for 4 seconds. The Receiver will beep and the LED will turn constant green. The Room thermostat and the Receiver are paired now. You will see the main screen of HT300S Smart.

Pairing completed

While pairing HT300S SMART follow below steps respectively ;

- Press the pairing button on the Receiver and wait until LED blinks green.
- Then, press the temperature increase button of HT300S SMART for 4 seconds.
- LED on the Receiver will be steady and HT300S SMART main screen will appear.
- If you have completed the steps, press the “Pairing completed” button.



Go to Wi-Fi settings, leave the device's network and connect a network with internet connection

I reconnected to Wi-Fi Network

Connect to your home Wi-Fi Network by opening your phone's Wi-Fi settings and press the "I reconnected to Wi-Fi Network" button. You will be redirected to the home page.



HT300S SMART



ISIPARK



18.0°



You can see your application membership information and log out of the application.



## ACCOUNT INFORMATION

### Contact Informations

ht300ssmart@generallife.com.tr

Log out

Build v1.0.9.0


If you would like to log out of the application, you may press the “Log Out” button.





## HT300S SMART


ISIPARK





18.0°



Devices linked to your account shown here.

 Shuts down HT300S SMART and heating unit.


 Button increases the set temperature value and the heating unit is controlled according to this value.

 Button reduces the set temperature value and the heating unit is controlled according to this value.


Select the device you wish to control.




Main menu of HT300S SMART appears and device name shown here.

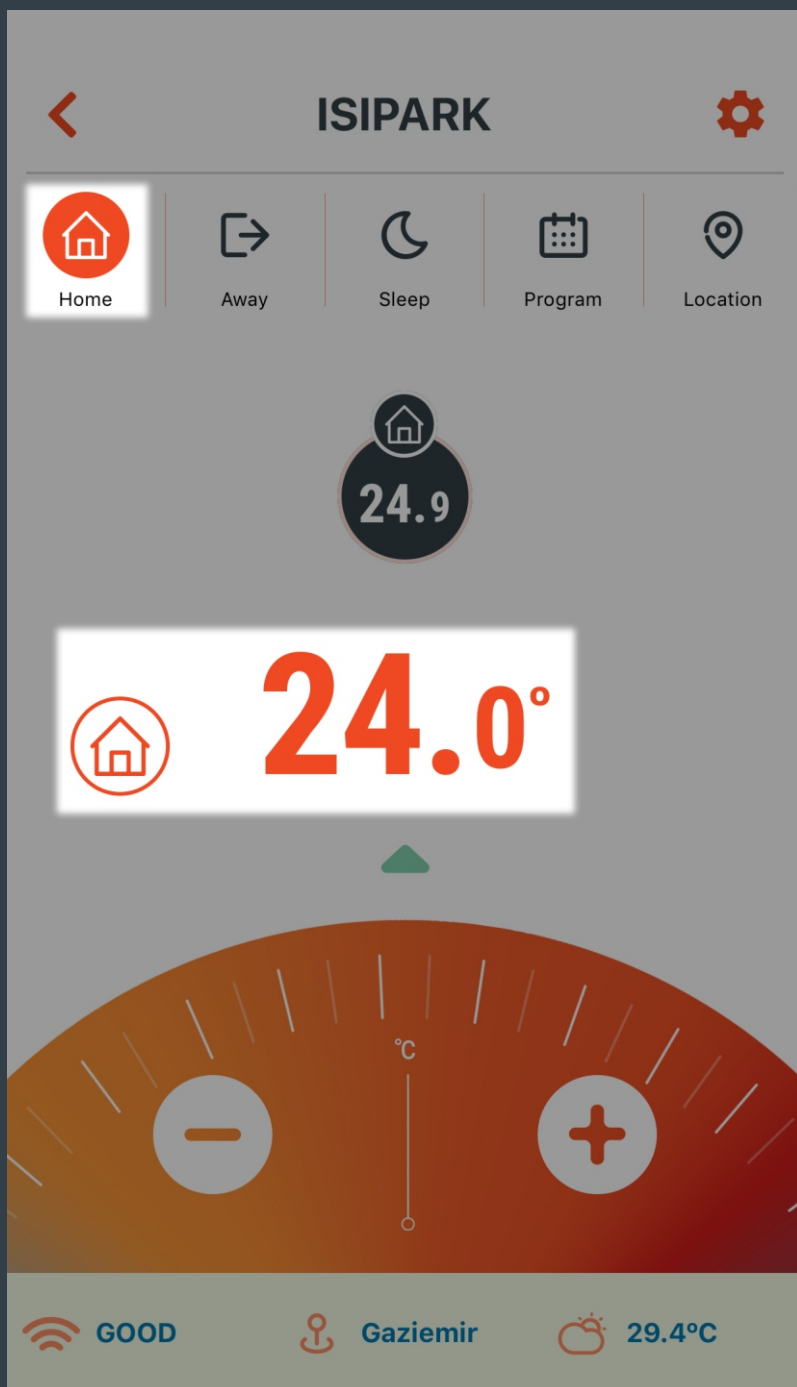


The heating unit is managed according to the temperature set for home mode.

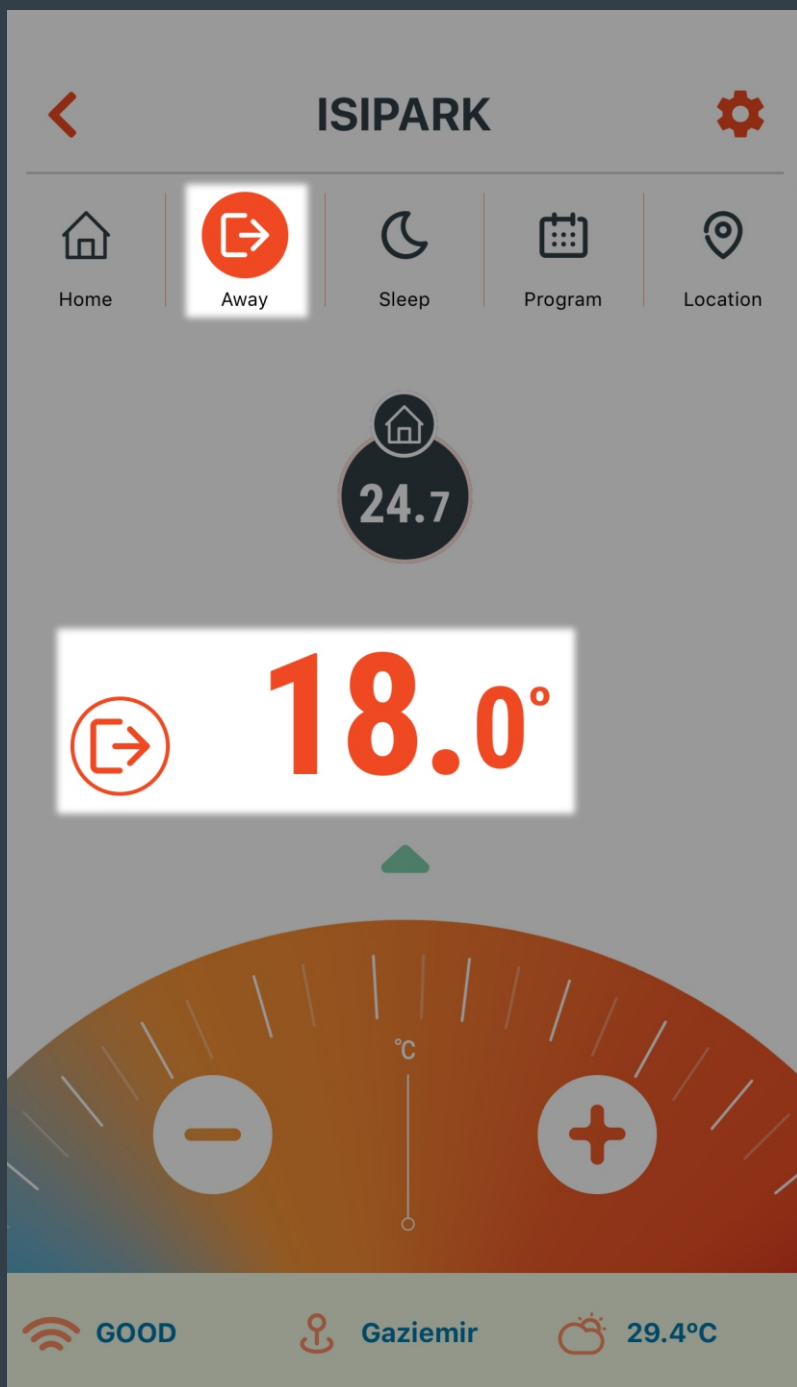


The heating unit is managed according to the temperature set for away mode.

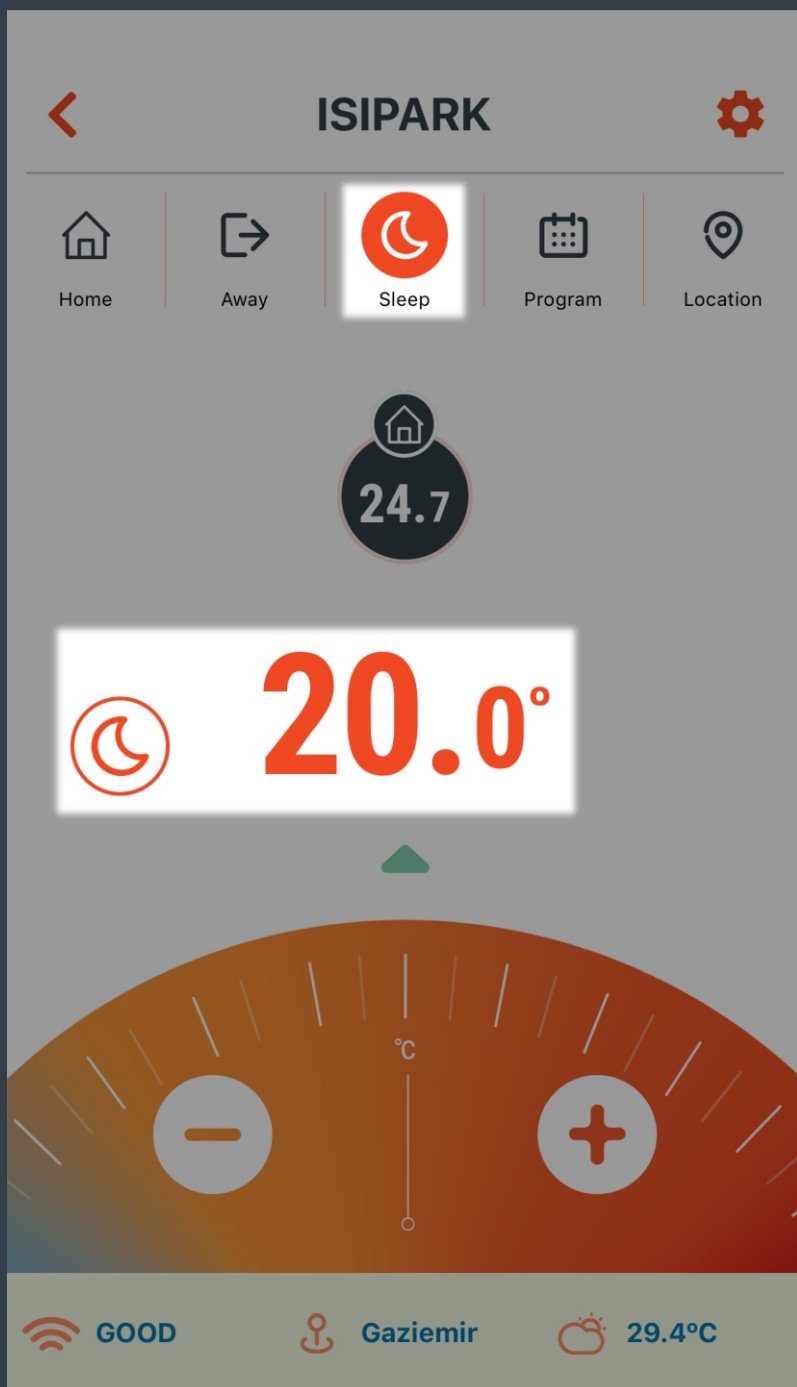

The heating unit is managed according to the temperature set for sleep mode.

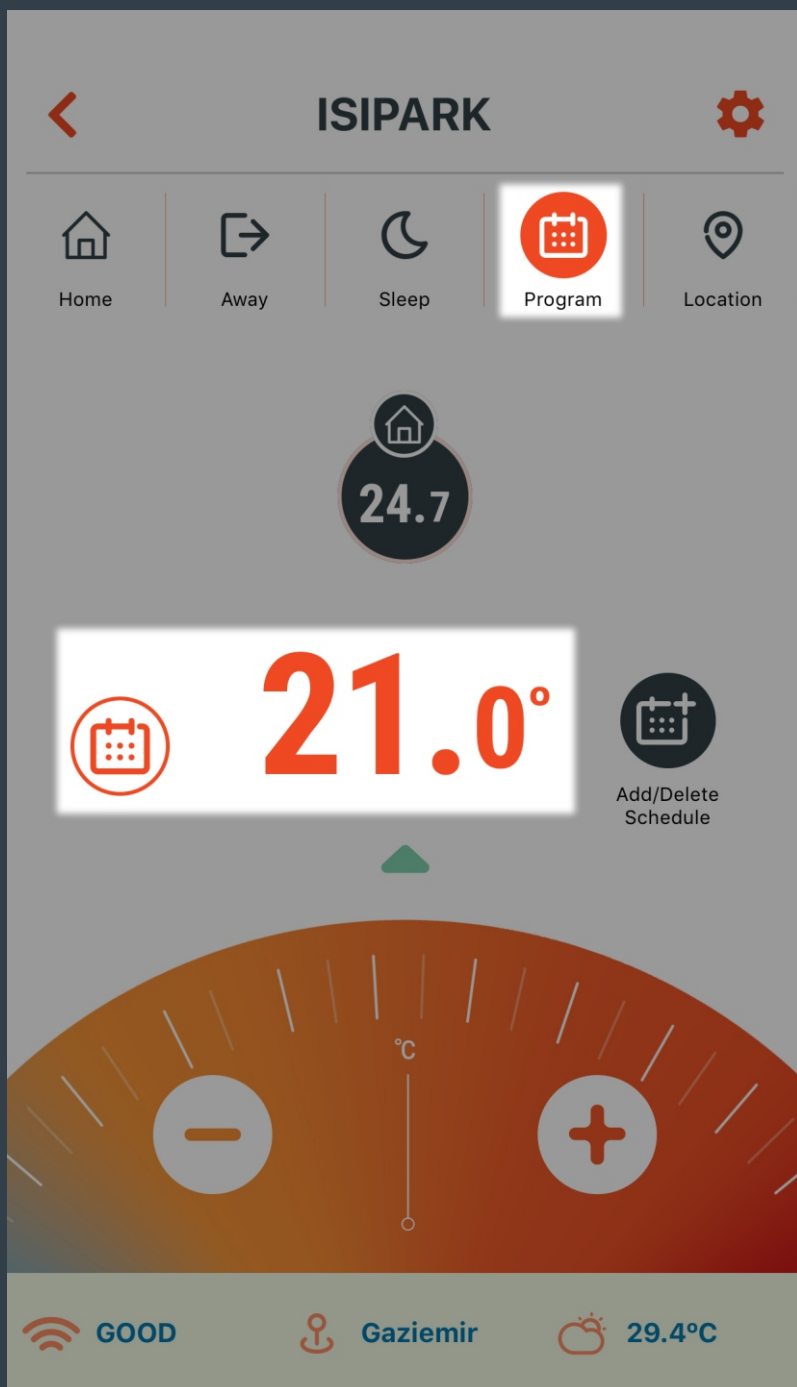

The heating unit is managed according to the temperature in the schedule added on a day and 30 minute basis in the Program Mode.

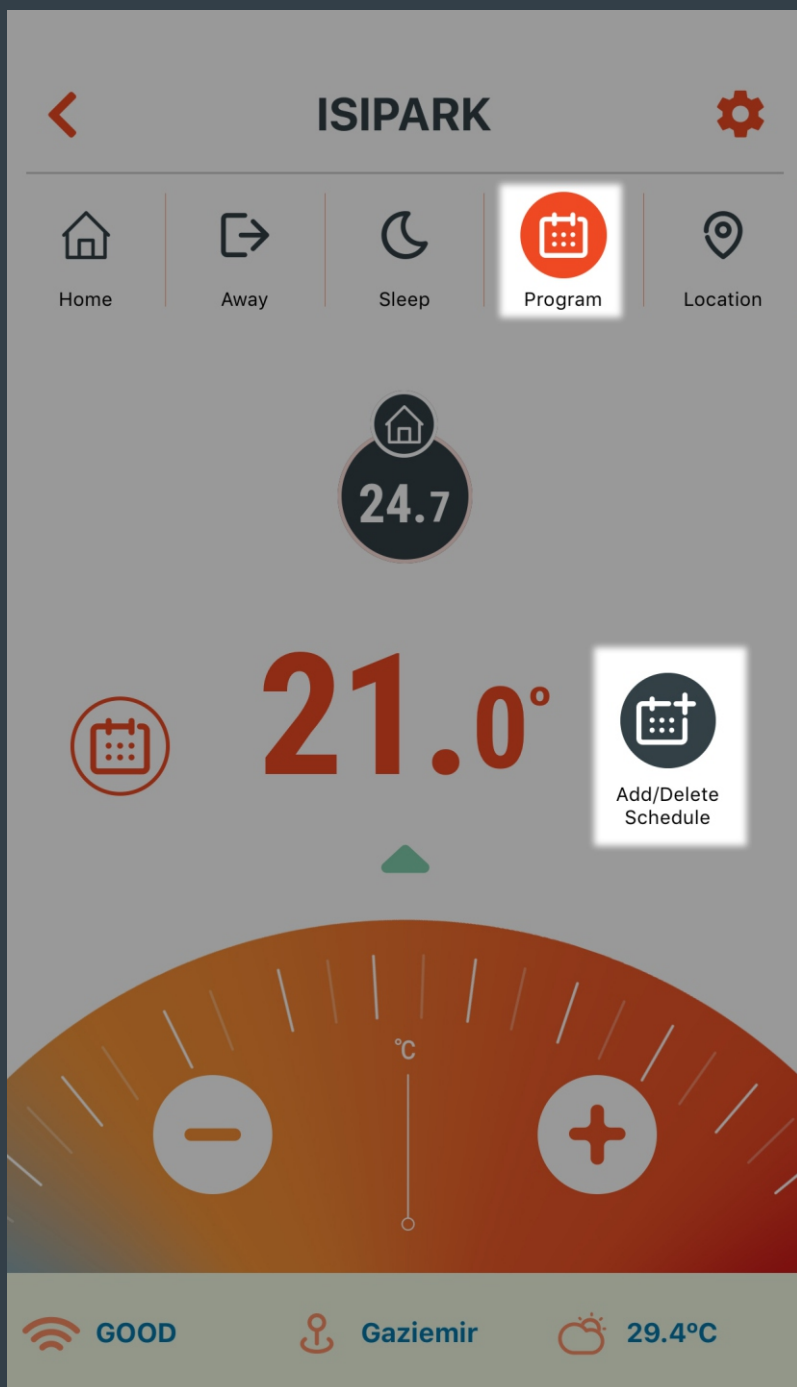

The screen where you can set the daily or weekly schedule settings appears when you press on the “Add/Delete Schedule” button.

You can access the same menu by pressing the Program Mode button for 3 seconds.



# ISIPARK

## PROGRAMMING MODE

### Monday

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

### Tuesday

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

### Wednesday

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

### Thursday

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23


### Friday

 + ADD SCHEDULE

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

A daily or weekly schedule is added by pressing the “ADD SCHEDULE” button.



 **ISIPARK**

Please choose the day

Monday

Tuesday

Wednesday



Thursday

Friday

Saturday



Sunday

Please choose an hour





07


30



Choose a set temperature



22.8°




**SAVE THE SCHEDULE** 

Select the day or days you wish to program.

Select the time you wish to program.

 /  button sets the desired temperature to program.

The changed settings are saved by pressing “SAVE THE SCHEDULE” button.

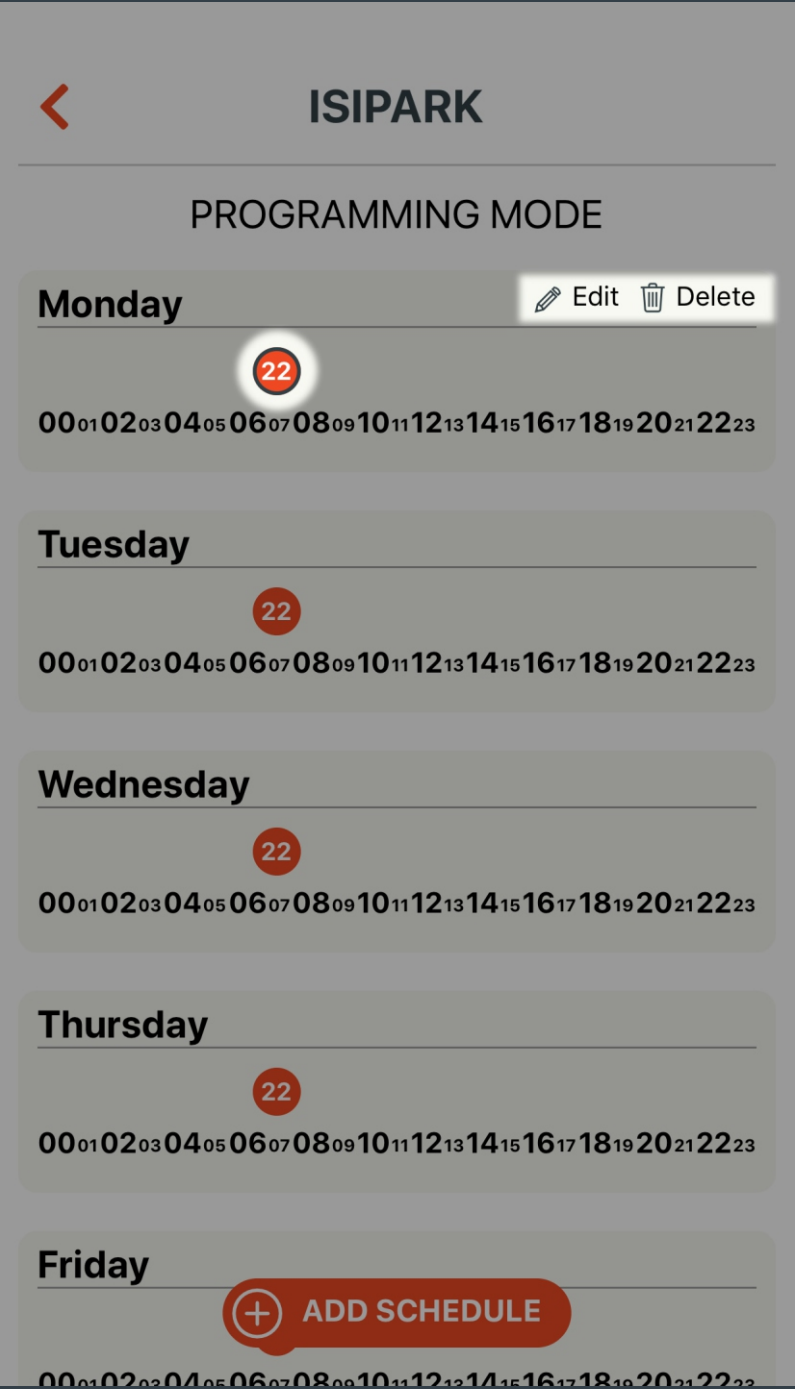

If you wish to change or delete the setting made; Press on the time you wish to change or delete. "Edit" or "Delete" buttons located in the upper right corner can be used to make changes.



# ISIPARK

## PROGRAMMING MODE

22

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

### Friday

22

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

### Saturday

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

### Sunday


00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

Remove all schedules



ADD SCHEDULE

Pressing “Remove all schedules” button opens the page to remove all schedules added.

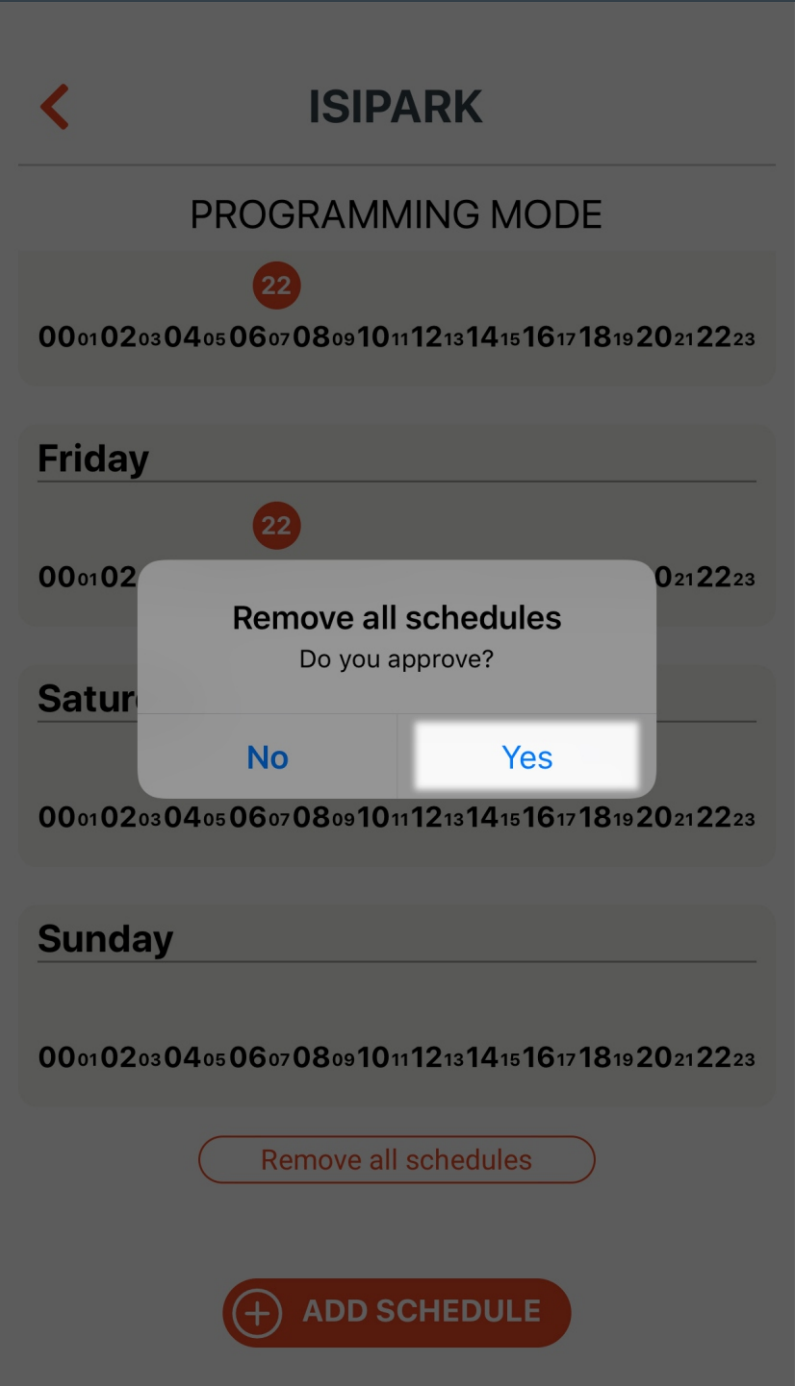

All schedules are removed when pressed “Yes” button.



# ISIPARK

## PROGRAMMING MODE

00<sub>01</sub>02<sub>03</sub>04<sub>05</sub>06<sub>07</sub>08<sub>09</sub>10<sub>11</sub>12<sub>13</sub>14<sub>15</sub>16<sub>17</sub>18<sub>19</sub>20<sub>21</sub>22<sub>23</sub>

### Friday

00<sub>01</sub>02<sub>03</sub>04<sub>05</sub>06<sub>07</sub>08<sub>09</sub>10<sub>11</sub>12<sub>13</sub>14<sub>15</sub>16<sub>17</sub>18<sub>19</sub>20<sub>21</sub>22<sub>23</sub>

### Saturday

00<sub>01</sub>02<sub>03</sub>04<sub>05</sub>06<sub>07</sub>08<sub>09</sub>10<sub>11</sub>12<sub>13</sub>14<sub>15</sub>16<sub>17</sub>18<sub>19</sub>20<sub>21</sub>22<sub>23</sub>

### Sunday

00<sub>01</sub>02<sub>03</sub>04<sub>05</sub>06<sub>07</sub>08<sub>09</sub>10<sub>11</sub>12<sub>13</sub>14<sub>15</sub>16<sub>17</sub>18<sub>19</sub>20<sub>21</sub>22<sub>23</sub>


Remove all schedules

All schedules have been removed


You can return to the previous menu by pressing the “Back” button.



The heating unit is managed according to the range and temperature set for home mode.

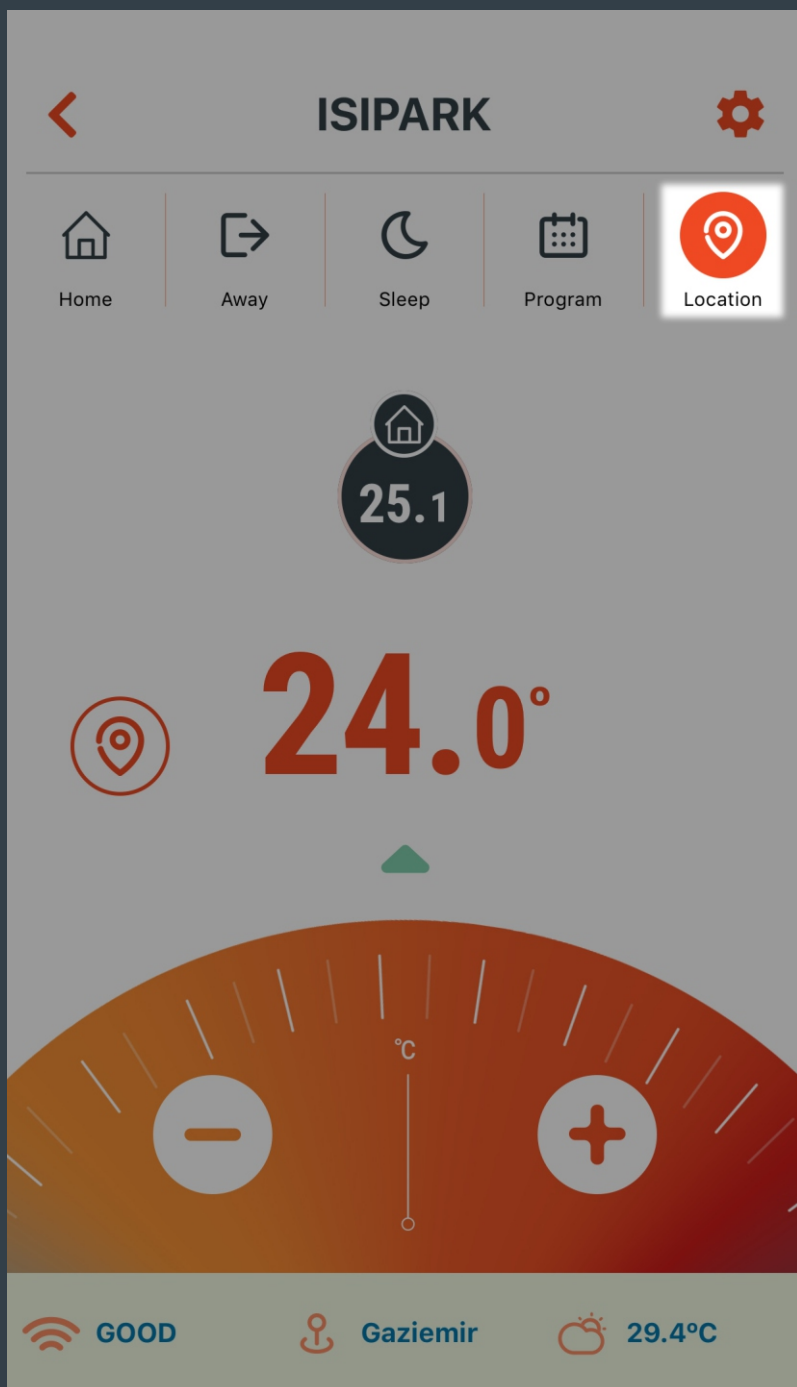

Press the “Location Mode” button for 3 seconds to quickly switch to the “Location Mode” settings.  
The screen where you can set the location mode settings will appear.

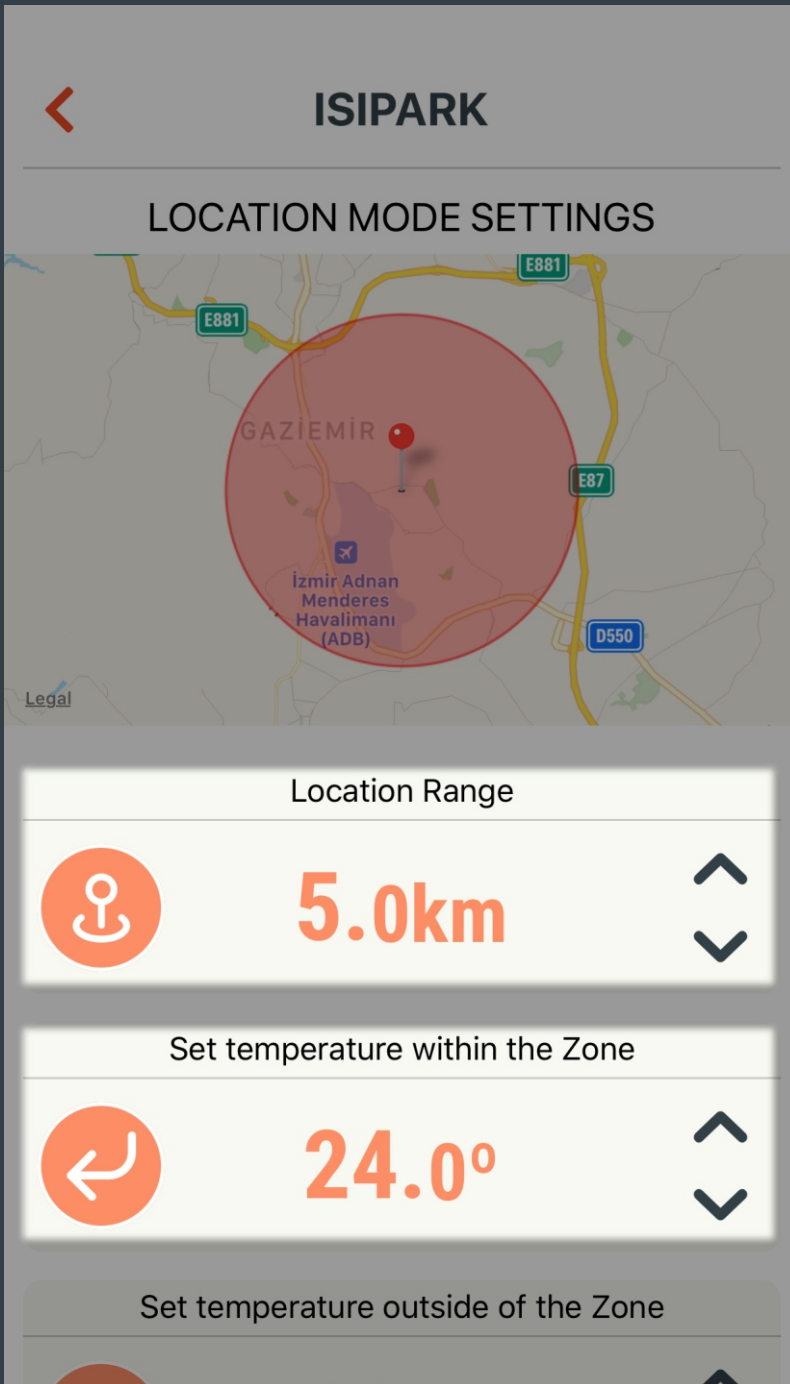

Desired range and temperature value for the “Location Mode” can be set here.



ISIPARK

İzmir Adnan Menderes Havalimanı (ADB)

E87

D550

Legal

Location Range

5.0km

Set temperature within the Zone

24.0°

Set temperature outside of the Zone

18.0°

Save the changes

Desired range and temperature value for the “Location Mode” can be set here.



## ISIPARK



### Location Range



5.0km



### Set temperature within the Zone



24.0°



### Set temperature outside of the Zone



18.0°



Save the changes ✓


Press the “Save the Changes” button to save the changes have been made.



Temperature value measured by HT300S SMART is shown here.



Set temperature value for the selected mode is shown here.

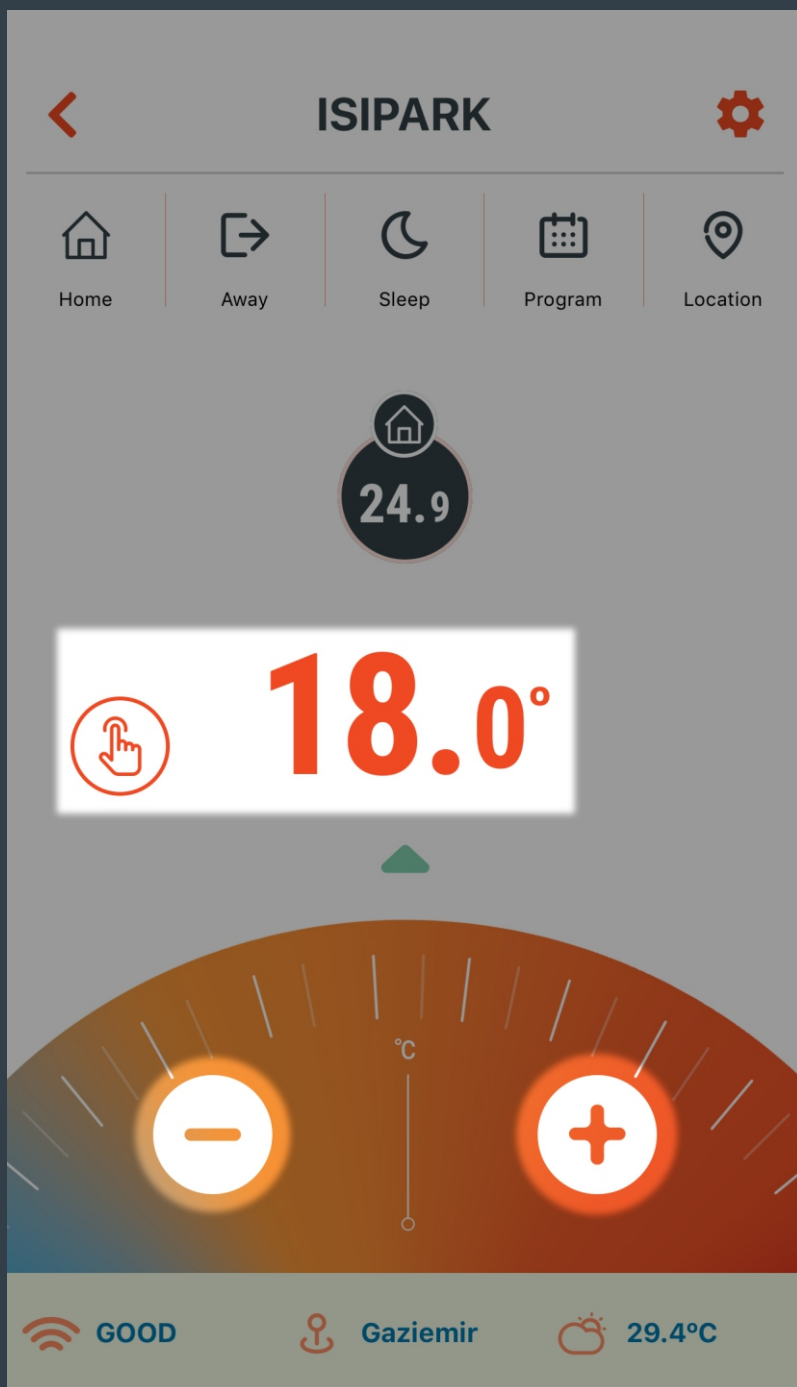

– button reduces the set temperature value and the heating unit is managed according to this value.

+ button increases the set temperature value and the heating unit is managed according to this value.

Manuel Mode becomes active.



Shows the internet connection status of HT300S SMART.



Shows the location of HT300S SMART.



Estimated outside temperature taken from the meteorological data station according to the position of the HT300S SMART is shown here.





Settings menu can be opened by pressing here.



## ISIPARK

### DEVICE SETTINGS



Turn off the Device's Backlight



Calibration Settings

0.0°



Turn off the Device



Device Informations



Modes



Device Users



Resync the Device



The backlight of the HT300S SMART is turned on or off by pressing here.



# ISIPARK

## DEVICE SETTINGS



Turn off the Device's Backlight



Calibration Settings

1.0°



Turn off the Device



Device Informations



Modes



Device Users



Resync the Device



Device calibration setting can be done here.



# ISIPARK

## DEVICE SETTINGS



Turn off the Device's Backlight



Calibration Settings

0.0°



Turn on the Device



Device Informations



Modes



Device Users



Resync the Device



Shuts down HT300S SMART  
and heating unit.



## ISIPARK

### DEVICE SETTINGS



Turn off the Device's Backlight



Calibration Settings

0.0°



Turn off the Device



Device Informations



Modes



Device Users



Resync the Device



Device name can be changed here.



## ISIPARK

Change the Device Name

ISIPARK-2



Save the Device Name ✓

Changed device name can be saved by pressing “Save the Device Name” button.



# ISIPARK


Change the Device Name

ISIPARK



Save the Device Name ✓

You can return to the previous menu by pressing the “Back” button.

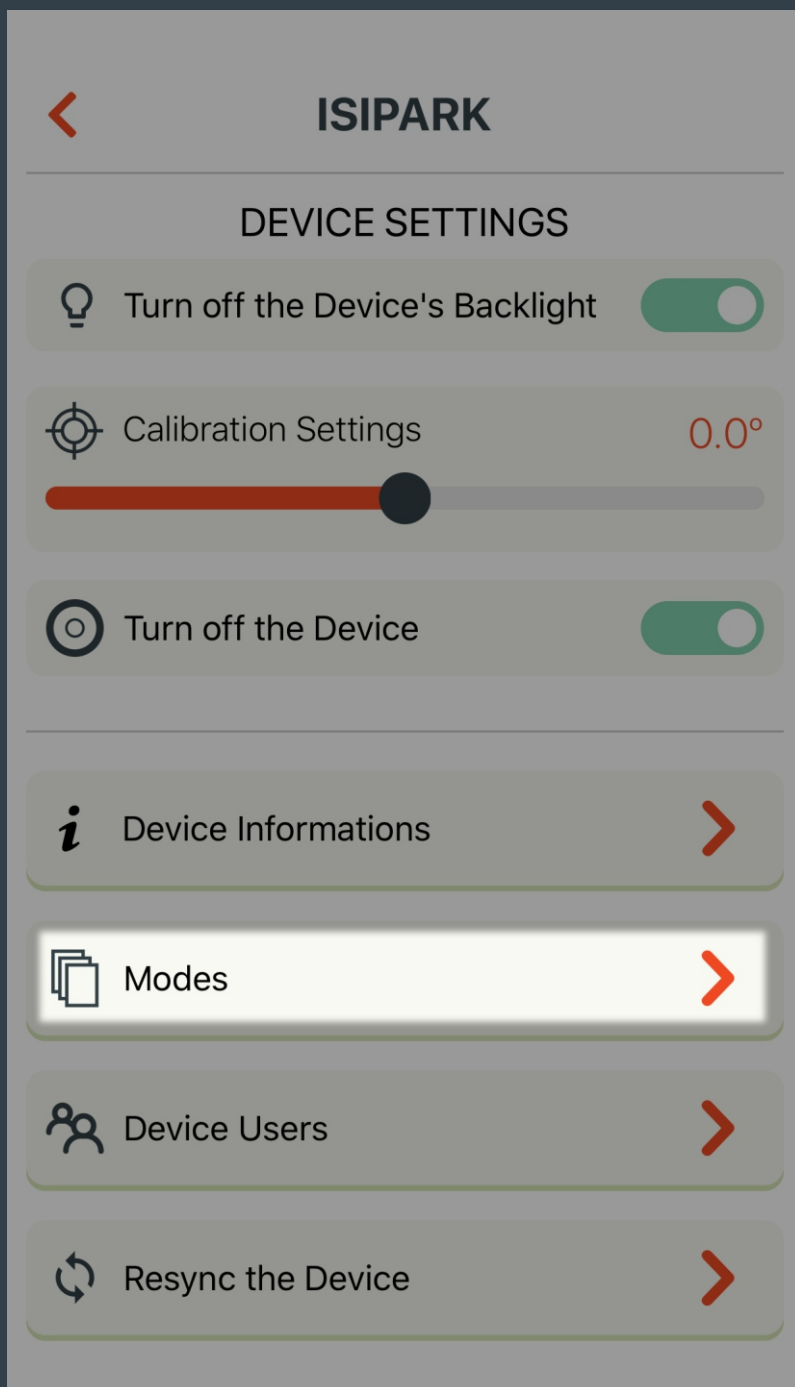


The screen which temperature values of the modes can be set appears.





Temperature values of the Home, Away and Sleep Modes can be set.

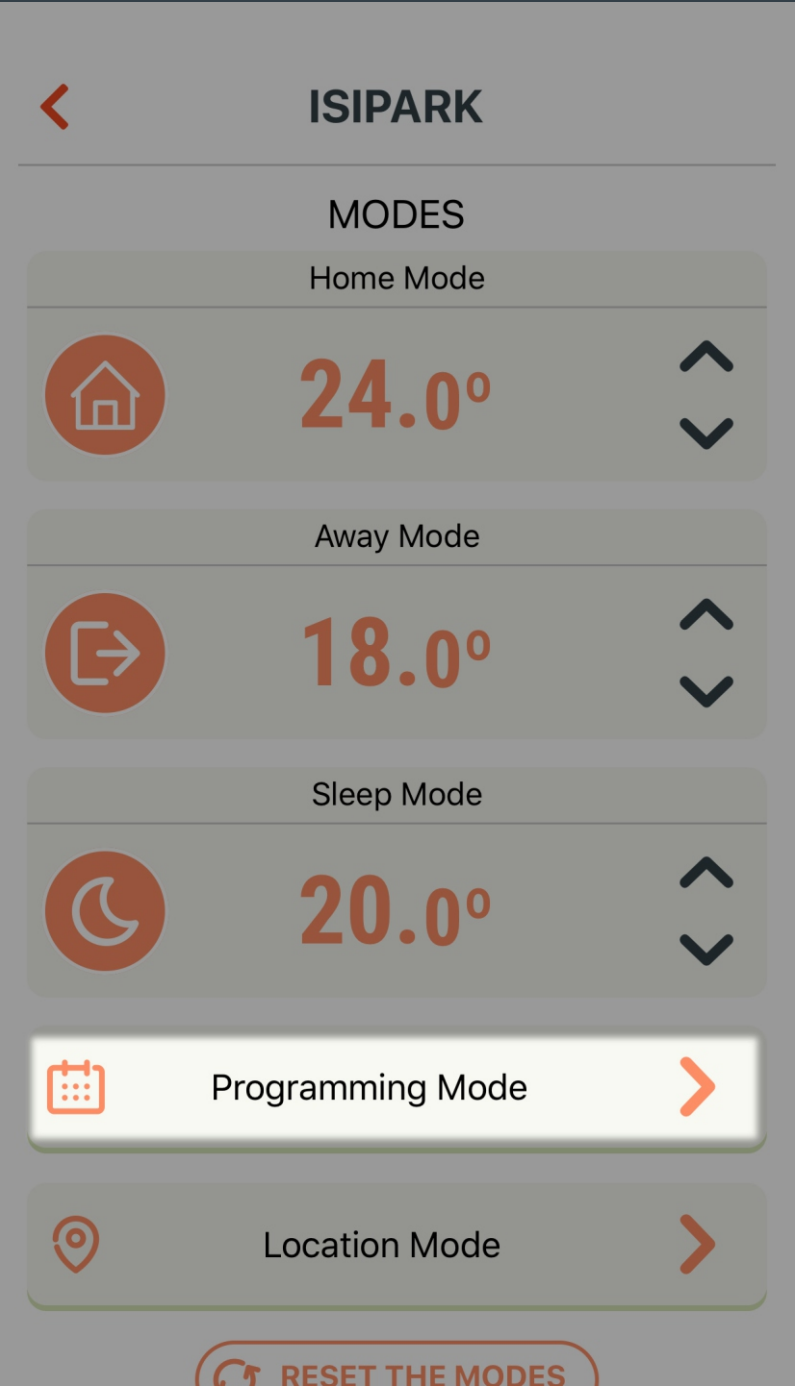

Program Mode appears to add/delete daily or weekly schedule.



# ISIPARK

## PROGRAMMING MODE

### Monday

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

### Tuesday

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

### Wednesday

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

### Thursday


00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

### Friday

 + ADD SCHEDULE

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23







A daily or weekly schedule is added by pressing the “ADD SCHEDULE” button.

 **ISIPARK**




Please choose the day


Monday	Tuesday	Wednesday
Thursday	Friday	Saturday
Sunday		

Please choose an hour





Choose a set temperature




**SAVE THE SCHEDULE** 

Select the day or days you wish to program.

Select the time you wish to program.

 /  button sets the desired temperature to program.

The changed settings are saved by pressing “SAVE THE SCHEDULE” button.

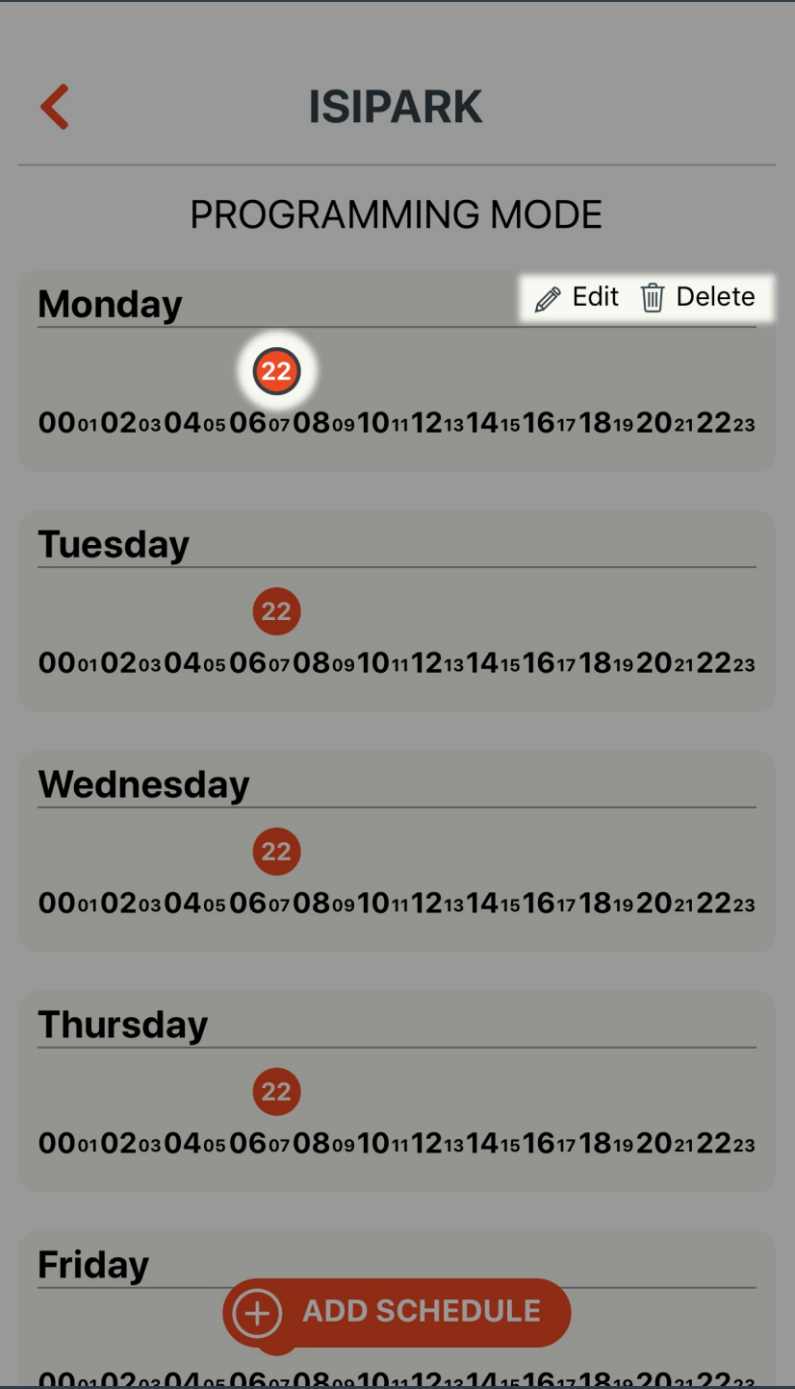

If you wish to change or delete the setting made; Press on the time you wish to change or delete. "Edit" or "Delete" buttons located in the upper right corner can be used to make changes.



# ISIPARK

## PROGRAMMING MODE

22

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

### Friday

22

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

### Saturday

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

### Sunday


00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23

Remove all schedules



ADD SCHEDULE

Pressing “Remove all schedules” button opens the page to remove all schedules added.

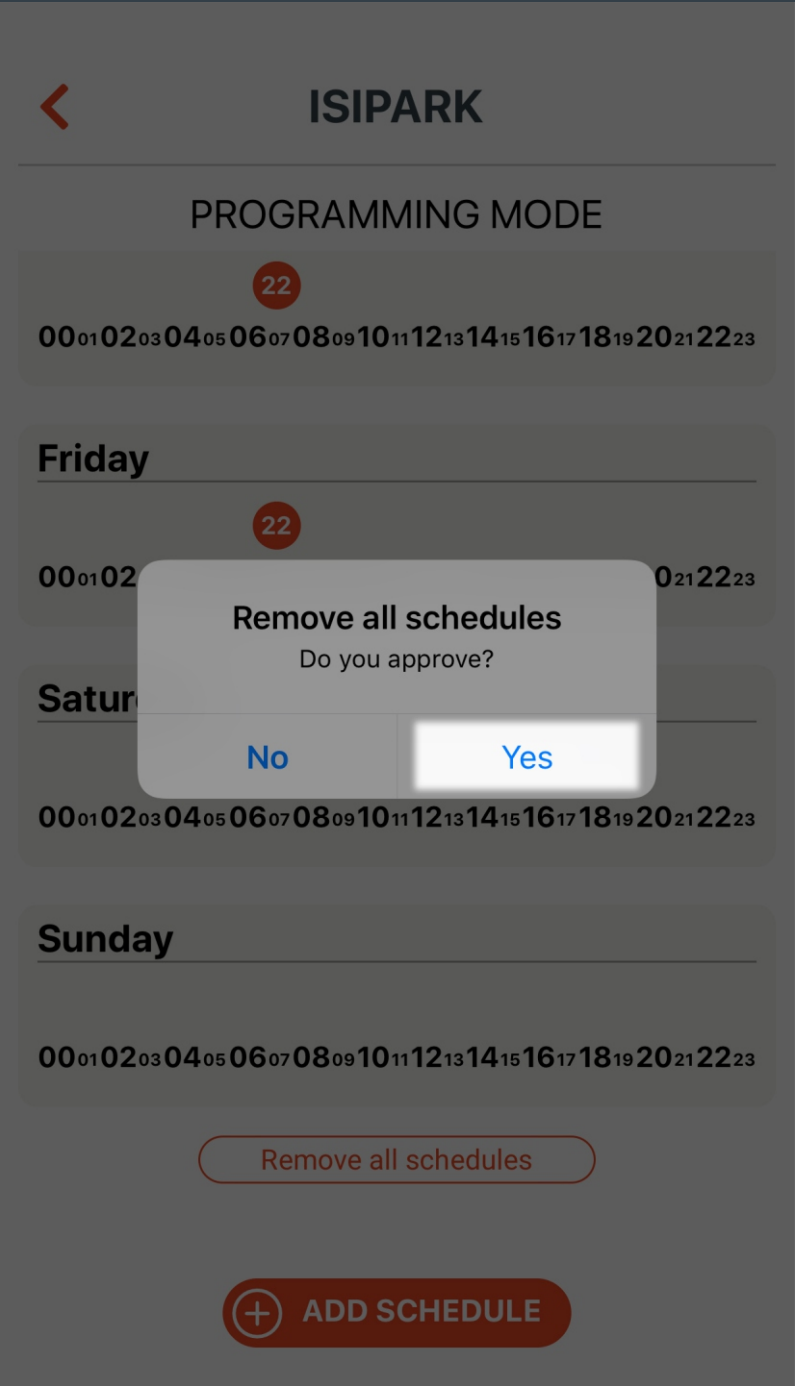

All schedules are removed when pressed “Yes” button.



# ISIPARK

## PROGRAMMING MODE

00<sub>01</sub>02<sub>03</sub>04<sub>05</sub>06<sub>07</sub>08<sub>09</sub>10<sub>11</sub>12<sub>13</sub>14<sub>15</sub>16<sub>17</sub>18<sub>19</sub>20<sub>21</sub>22<sub>23</sub>

### Friday

00<sub>01</sub>02<sub>03</sub>04<sub>05</sub>06<sub>07</sub>08<sub>09</sub>10<sub>11</sub>12<sub>13</sub>14<sub>15</sub>16<sub>17</sub>18<sub>19</sub>20<sub>21</sub>22<sub>23</sub>

### Saturday

00<sub>01</sub>02<sub>03</sub>04<sub>05</sub>06<sub>07</sub>08<sub>09</sub>10<sub>11</sub>12<sub>13</sub>14<sub>15</sub>16<sub>17</sub>18<sub>19</sub>20<sub>21</sub>22<sub>23</sub>

### Sunday

00<sub>01</sub>02<sub>03</sub>04<sub>05</sub>06<sub>07</sub>08<sub>09</sub>10<sub>11</sub>12<sub>13</sub>14<sub>15</sub>16<sub>17</sub>18<sub>19</sub>20<sub>21</sub>22<sub>23</sub>

Remove all schedules


All schedules have been removed

You can return to the previous menu by pressing the “Back” button.





The screen appears where you can set the location mode settings.

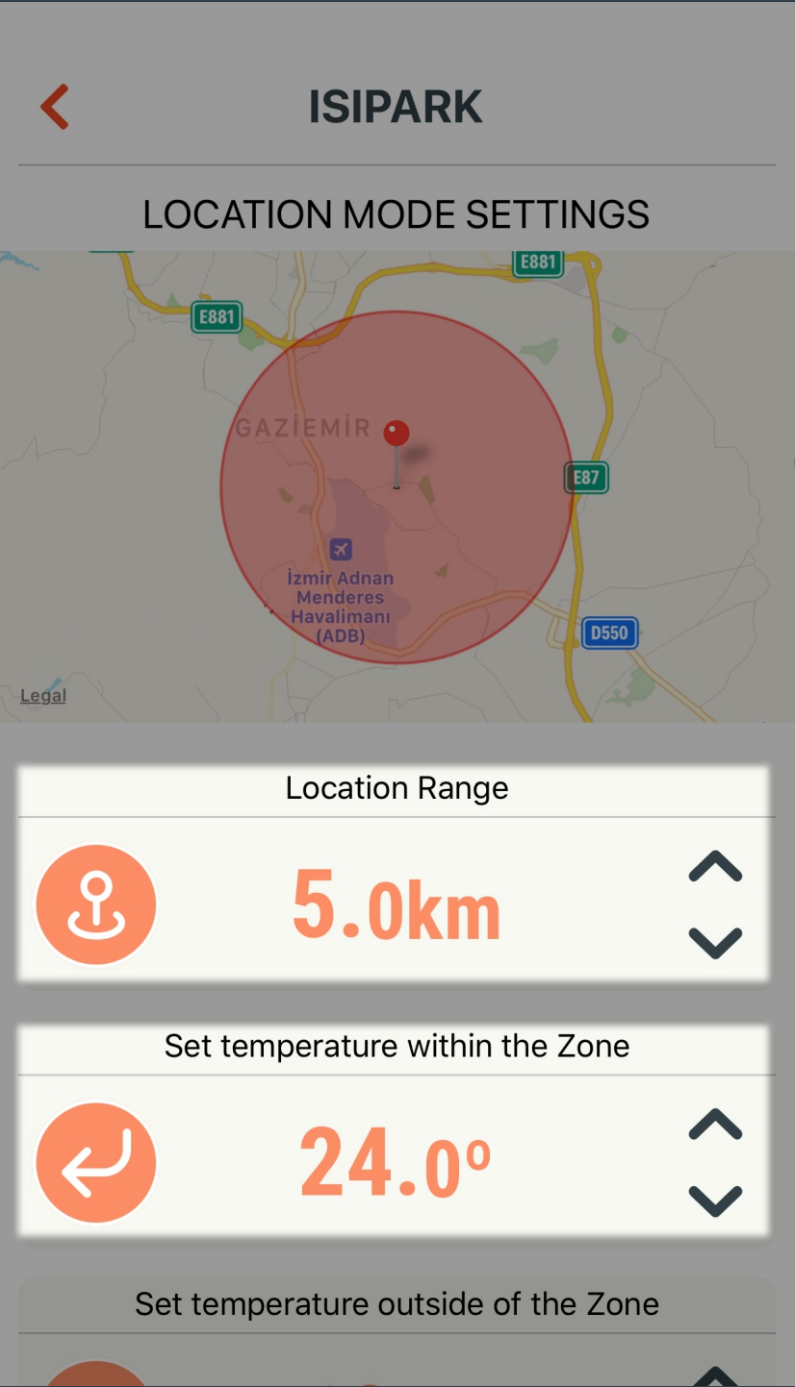

Desired range and temperature value for the Location Mode can be set here.

ISIPARK

İzmir Adnan Menderes Havalimanı (ADB)

E87

D550

Legal

Location Range

5.0km

Set temperature within the Zone

24.0°

Set temperature outside of the Zone

18.0°

Save the changes

Desired range and temperature value for the Location Mode can be set here.



## ISIPARK



### Location Range



5.0km



### Set temperature within the Zone



24.0°



### Set temperature outside of the Zone



18.0°



Save the changes ✓

Press the “Save the Changes” button to save the changes have been made.



## ISIPARK


Home Mode



24.0°



Away Mode



18.0°



Sleep Mode



20.0°



Programming Mode



Location Mode



RESET THE MODES

Restores set values for all modes to factory settings.



# ISIPARK

## DEVICE SETTINGS



Turn off the Device's Backlight



Calibration Settings

0.0°



Turn off the Device



Device Informations



Modes



Device Users



Resync the Device



The list of current users is shown here. User can be added or removed in this page.



## ISIPARK

### DEVICE USERS




ht300ssmart@generallife.com.tr




ADD USER

Adds invited user to manage  
HT300S SMART.

 **ISIPARK**

DEVICE USERS

 ht300ssmart@generallife.com.tr

**Add User**

Enter the e-mail address of the User  
you would like to add



Cancel



Invite

"tr"

q w e r t y u i o p

a s d f g h j k l

 z x c v b n m 

123   space return

The e-mail address of the invited user must to be entered.





## ISIPARK

### DEVICE USERS



guest@generallife.com.tr



ht300ssmart@generallife.com.tr



ADD USER

The invited user is deleted.



## ISIPARK

### DEVICE SETTINGS



Turn off the Device's Backlight



Calibration Settings

0.0°



Turn off the Device



Device Informations



Modes



Device Users



Resync the Device



Resets HT300S SMART.



If you activate the Location Mode, your Smart Room Thermostat will automatically bring the ambient temperature to the value you have set when you approach or move away from the relevant location.

### Location Access

GLife collects location data to automatically adjust the ambient temperature according to value you have set as you approach or move away from the relevant location where your Smart Room Thermostat is located even when the application is closed or not in use.

OK

Location Permission is Obtaining...

Allow location access to use “Location Mode” and see current weather condition.



Firstly, remove the key lock while setting up your HT300S Smart device. Press the On/Off button for 4 seconds to switch the device to Off mode. Then, press the temperature decrease button for 4 seconds and wait for '1' appears on the screen.

'1' Appeared on the Screen

Plug in the device before initiating the re-pairing process. Remove the key lock by pressing the “ Mode “ button for 2 seconds.

Turn off the device by pressing the “ On/Off “ button for 4 seconds.

The number “1” will appear on the screen once you press the temperature decreasing button for 4 seconds.



Connect to HT300S\_SMART\_XXXX network with Wi-Fi and  
proceed to the next screen

Check the HT300S Smart connection

Go to the Wi-Fi settings of your device and make sure you are connected to the HT300S\_SMART\_XXXX network. Then, press the “Check the HT300S Smart connection” button.



Choose the Wi-Fi Network you use at your home  
or office and enter the password

ISIPARK



ISIPARK-GUEST



ISIPARK-1



ISIPARK-2



HP-PRINT



GENERAL LIFE



ISIPARK

generallife

Connect to Wi-Fi

Choose the Wi-Fi Network that  
HT300S SMART can connect  
and enter the password.  
In case the Wi-Fi network does  
not appear in the list, manually  
type the network name

Press "Connect to Wi-Fi"  
once correct information is  
entered.



Please wait until '2' and '3' appears on HT300S Smart's screen, respectively. If '1' appeared on the screen, it indicates that you have entered incorrect Wi-Fi information. Please turn back to HT300S Smart network connection step and follow the instructions again.

'3' Appeared on the Screen

Wait until the number “3” is shown on the device.  
Press the button if you see the number “3” on the device.

\*If the number “1” is shown on the device, it means you have entered incorrect Wi-Fi information. Enter the correct information by returning back to the “Connect to Wi-Fi” step.



While pairing the Room Thermostat with the Receiver, you must press the pairing button on the Receiver and wait for green light flashing. Subsequently, press the temperature increase button for 4 seconds. The Receiver will beep and the LED will turn constant green. The Room thermostat and the Receiver are paired now. You will see the main screen of HT300S Smart.

Pairing completed

While pairing HT300S SMART follow below steps respectively ;

- Press the pairing button on the Receiver and wait until LED blinks green.
- Then, press the temperature increase button of HT300S SMART for 4 seconds.
- LED on the Receiver will be steady and HT300S SMART main screen will appear.
- If you have completed the steps, press the “Pairing completed” button.





Go to Wi-Fi settings, leave the device's network and connect a network with internet connection

I reconnected to Wi-Fi Network

Connect to your home Wi-Fi Network by opening your phone's Wi-Fi settings and press the "I reconnected to Wi-Fi Network" button. You will be redirected to the home page.



**Step Into the World of GENERAL Life**



LOGIN



REGISTER



INVITED USER



HELP

Build v1.0.9.0

In case you forget your password, press the “LOGIN” button on the initial screen.



## LOGIN

E-Mail Address

Password





[Forgot password](#)

LOGIN

[Terms of Use](#)

Press the “Forgot Password” button in the LOGIN screen.



LOGIN

E-Mail Address

Password

Forgot password

Please enter your e-mail address

ht300ssmart@generallife.com.tr

Cancel

Send

[Terms of Use](#)

Enter the e-mail address linked to your account and press "Send" button.



## Change Password

Please enter all password renewal codes sent to your e-mail.

Code 1

Continue

- On the page that appears, code need to be entered.
- Code can be found in the e-mail under the GLife subject sent to your e-mail address which you entered for the password reset request.
- Enter the code to the “Code1” section in the application.



## Change Password

Please enter your new password



Update

Enter your new password to the “Password” and “Re-enter Password” sections in the page appears after you entered to code and press “Update” button.



## Step Into the World of GENERAL Life



LOGIN



REGISTER



INVITED USER

Password successfully changed. Please login  
with your new password

Build v1.0.9.0

Once you see the “Password  
successfully changed.”  
notification, you can use your  
new password.